

Technical data



HN Sunlight

Useful operating life 1000 h

Tanning Tube OH M 3URO 100 R 05

Article 80041093

UV-CODE**

Lifetime 700 h Reduction on UV based on 20h value 20%

Dimensions: see drawing (not to scale)


Length (la)	Socket	G13
Reflector	Elektrode	short mount
Pin distance (lb)	Diameter (d)	0.0 mm

Operating data:

Lamp wattage nom.	100.0 W	Burning position: horizontal
Lamp current		Cooling: convective heat transfer
Lamp voltage		Surrounding temperature: 20°C +/- 1°C

Irradiation data:

- UVA flux
- UV-B/UV-A
- Eer-B*
- Eer-A*
- ENMSC-B*
- ENMSC-A*
- Immediate pigm.*
- Sun erythemal factor*
- Color parameters (x,y)

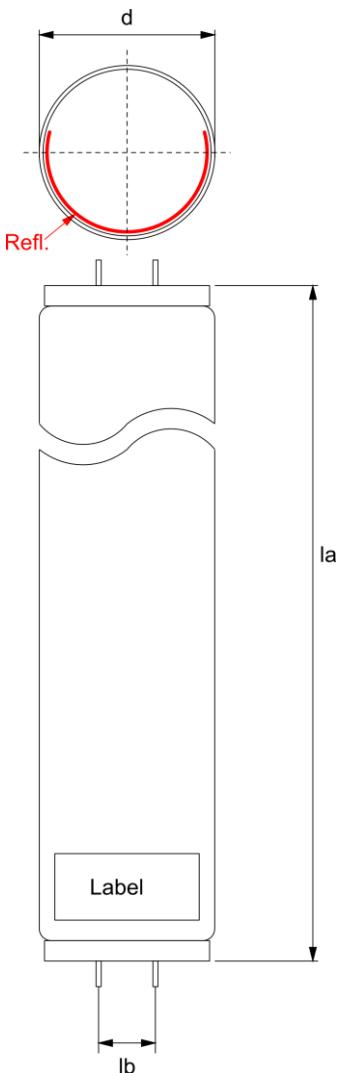

HN Sunlight GmbH reserves the right to alter the illustrations and technical data in this Technical Data Sheet. The latest updated version of the Technical Data Sheet is prevailing. It is within the customer's responsibility to check whether he is in possession of the latest updated version of the Technical Data Sheet.

The data given are based on average data und has been determined by measurements made in the laboratory under standard conditions. There could be minor deviations due to technical and/or physical reasons.

* These irradiation data of a single tube have been measured in a distance of 25 cm.

**Valid with 1h preageing process, 25 cm distance between tube surface and sensor, in thermal balance.



Maximum tanning-time in a conventional sunbed

Skintype:	I*)	II*)	III	IV	V	VI
1st session:	#Fehler	#Fehler	#Fehler	#Fehler	#Fehler	#Fehler
Maximum tanning-time:	#Fehler	#Fehler	#Fehler	#Fehler	#Fehler	#Fehler

*) tanning should be prevented.



HN Sunlight GmbH - Original Hanau
Amberg Haus, Kurt-Blaum-Platz 2
D-63450 Hanau
Tel.: +49 6181 / 35-5092
Fax: +49 6181 / 35-5096
E-mail: info@original-hanau-suncare.com
www.original-hanau-suncare.com

automatically processed at: 16.10.2014

