

NewColors


Useful operating life 800 h

Tanning Tube	OH N 3URO 180 R DUAL		
Article	80040499		
UV-CODE**	180-R-54/3.8		
Lifetime	600 h	Reduction on UV based on 20h value	30%

Dimensions:	see drawing (not to scale)		
Length (la)	2001 mm	Socket	G13
Reflector	210.0°	Elektrode	short mount
Pin distance (lb)	12.7 mm	Diameter (d)	38.1 mm

Operating data:		
Lamp wattage nom.	180.0 W	Burning position: horizontal
Lamp current	2.0 A	Cooling: convective heat transfer
Lamp voltage	90.0 V	Surrounding temperature: 20°C +/- 1°C

Irradiation data:		
UVA flux	35 W	
UV-B/UV-A	1.3%	
Eer-B*		
Eer-A*		
ENMSC-B*		
ENMSC-A*		
Immediate pigm.*		
Sun ervthema factor*	11.0%	
Color parameters (x,y)		

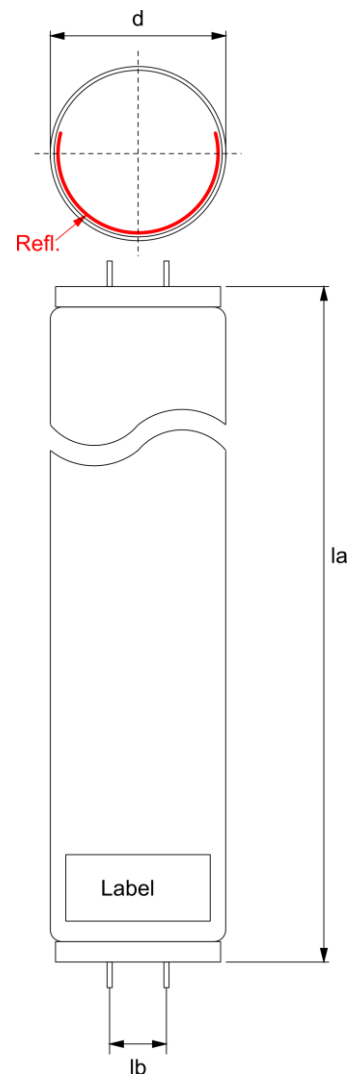

HN Sunlight GmbH reserves the right to alter the illustrations and technical data in this Technical Data Sheet. The latest updated version of the Technical Data Sheet is prevailing. It is within the customer's responsibility to check whether he is in possession of the latest updated version of the Technical Data Sheet.

The data given are based on average data and has been determined by measurements made in the laboratory under standard conditions. There could be minor deviations due to technical and/or physical reasons.

* These irradiation data of a single tube have been measured in a distance of 25 cm.

**Valid with 1h preageing process, 25 cm distance between tube surface and sensor, in thermal balance.



Maximum tanning-time in a conventional sunbed

Skintype:	I*)	II*)	III	IV	V	VI
1st session:	5 Min.	5 Min.	5 Min.	5 Min.	5 Min.	5 Min.
Maximum tanning-time:	5 Min.	5 Min.	19 Min.	24 Min.	24 Min.	24 Min.

*) tanning should be prevented.



HN Sunlight GmbH - Original Hanau
 Amberg Haus, Kurt-Blaum-Platz 2
 D-63450 Hanau
 Tel.: +49 6181 / 35-5092
 Fax: +49 6181 / 35-5096
 E-mail: info@original-hanau-suncare.com
 www.original-hanau-suncare.com

automatically processed at: 20.10.2014

