



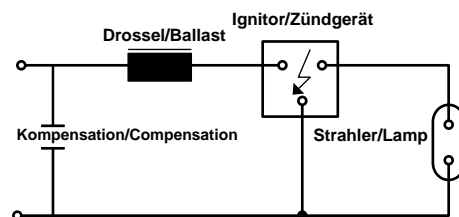

## Technical data sheet

Lamp	<b>OH Typ<sup>3</sup> 500 EC</b>
Article	80041806
Lifetime	700 h
Reduction on UV based on 20h value	20 %
Useful lifetime	1000 h
Length(la)	108.5 mm
Diameter(da)	16.5 mm
Socket	GY9,5 codiert F1/F2
Electrodes distance(lc)	32 mm
Lamp voltage	125 V
Lamp current	4.2 A
Ballast	250W HP    250W HP
Ignitor	3,5-5,0kVp, 10A
Compensation	40 µF
Cycle	25' / 5' (on/off)
Ignition retardation	30s
Burning position	vertical
Bulb temperature*	650°C - 950°C

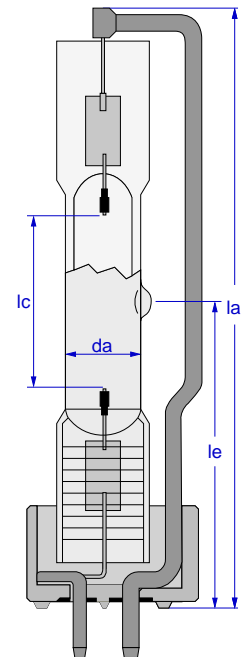

HN Sunlight GmbH reserves the right to alter the illustrations and technical data in this Technical Data Sheet. The latest updated version of the Technical Data Sheet is prevailing. It is within the customer's responsibility to check whether he is in possession of the latest updated version of the Technical Data Sheet.

The data given are based on average data und has been determined by measurements made in the laboratory under standard conditions. There could be minor deviations due to technical and/or physical reasons.

\*deviations may reduce products lifetime.

automatically processed at: 15.03.2022

